



Mosaic™ Socket outlets to Schuko standard

Cat. No(s): 0 772 13/14/18/45 - 0 792 13



0 772 13



0 772 14


1. USE

Socket outlet 16 A - 250 V~ to Schuko standard.

2. RANGE

	Designation	Cat. No.	Finishes	Nbr of modules	Connection method
	Socket 2P+E special 4 mm² and tapping	0 772 13	White	2	with screws
		0 792 13	Aluminium		
	Socket 2P+E Tamperproof	0 772 14	Red	2	with screws
		0 772 18			automatic
	Prise 2P+T 45° inclined	0 772 45	White	2	automatic

4.OVERALL DIMENSIONS

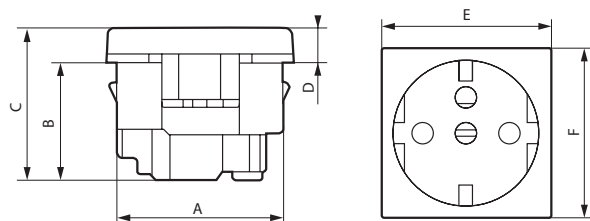

A	B	C	D	E	F
40.3	31.5	40	8.5	45	45

5. CONNECTION

Connection method	with screws	automatic
Capacity	2 x 4 mm²	2 x 2.5 mm²
Stripping length	10 mm	13 mm

Type of screwdriver to use: Flat-blade 4 mm

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Impact tests: IK 04

Protection against solid bodies / liquids: IP 20

■ 6.2 Material characteristics

Base: Polycarbonate

Cover plate: Polycarbonate

■ 6.3 Climatic characteristics

Self-extinguishing: 650° C / 30 s

Storage temperatures: - 10° C to + 70° C

Operating temperatures: - 5° C to + 50° C

7. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

■ 7.1 Resistance to cleaning agents

Resistance to the following agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

■ 7.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Anios, Surfanios, Bactylisine, Diluted hydrogen peroxide (35%).

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

8. ACCESSORIES

Tamperproof insert Cat. No. 0 502 99 for tamperproof socket outlet Cat. No. 0 772 14.