

## Non-Contact detection of AC Voltage



- Easy-to-use just touch the tip to an outlet or cord. When it glows red, you know there is voltage in the line.
- Fit in shirt pocket for convenience
- All outer surfaces are non-conductive for safety
- Detects voltage without metallic contact
- Self-test button (AC-8)

Specifications	
Standard	CATIV 600V, CAT III 1000V
Operating Range	VoltFinder: 200 ~ 1000V AC; 100 ~ 1000V AC
Operating Temp.	-10°C ~ 50°C
Operating Humidity	0°C ~ 30°C; 95%RH
	30°C ~ 40°C; 75%RH
	40°C ~ 50°C; 45%RH

**Size(HxWxD):** 158mm x 21mm x 25mm  
**Weight:** 48g (AC-8/AC-8S)

**Size(HxWxD):** 176mm x 26mm  
**Weight:** 48g (AC-9/AC-9B)

**Accessories:**  
Two "AAA" batteries and clamshell



Model AC-8



Model AC-10

Model AC-9

The Non-contact AC Voltage Testers are easy to use — just touch the tip to a terminal strip, outlet, or supply cord. When the tip glows red and the unit beeps, you know there's voltage present. Electricians, maintenance, service, safety personnel, and homeowners can quickly test for energized circuits in the workplace or at home.

- Suitable for outlets or against wire insulation testing
- Flashing red LED light indicator
- Built-in bright flashlight with ON/OFF button
- Convenient size with pocket clip
- Green light means you're close the voltage(AC-10/AC-10<sup>+</sup>)
- Red LED light and audible beeper indicator(AC-9B/AC-10/AC-10<sup>+</sup>)
- Motor Shaking and LED light (AC-9C)



- Bright Flashlight
- CAT III 1000V
- Red LED light and audible beeper indicator (AC-9B)
- Motor Shaking and LED light (AC-9C)



EMC & LVD  
EN: 61326  
EN: 61010-1, EN: 61010-02-031




Model AC-10<sup>+</sup>



Model AC-10<sup>+</sup>

Features		AC-8	AC-8B	AC-8S	AC-9	AC-9B	AC-9C	AC-10	AC-10B	AC-10S	AC-10 <sup>+</sup>
ACV Non-Contact Detection		*	*	*	*	*	*	*	*	*	*
Operating Range (50Hz/60Hz)	24V to 1000V			*							
	50V to 1000V	*						*		*	*
	100V to 1000V		*	*	*	*			*		
	200V to 1000V	*		*	*	*	*				
Voltage Sensitivity detector (Single)	*	*	Dual	*	*	*	*	*	*	*	*
Red LED indicators	*	*	*	*	*	*	*	*	*	*	*
Green LED indicators							*	*	*	*	*
Beeper sounds		*	*		*	*	*	*	*	*	*
Motor Shaking						*					
Flashlight function	*	*	*	*	*	*	*	*	*	*	*
Auto Power Off	*	*	*	*	*	*	*	*	*	*	*
System self test	*	*	*	*	*	*	*	*	*	*	*
Switchable audible and silent mode										*	*
Rugged, double molded case	*	*	*	*	*	*	*	*	*	*	*
CAT III-1000V	*	*	*	*	*	*	*	*	*	*	*

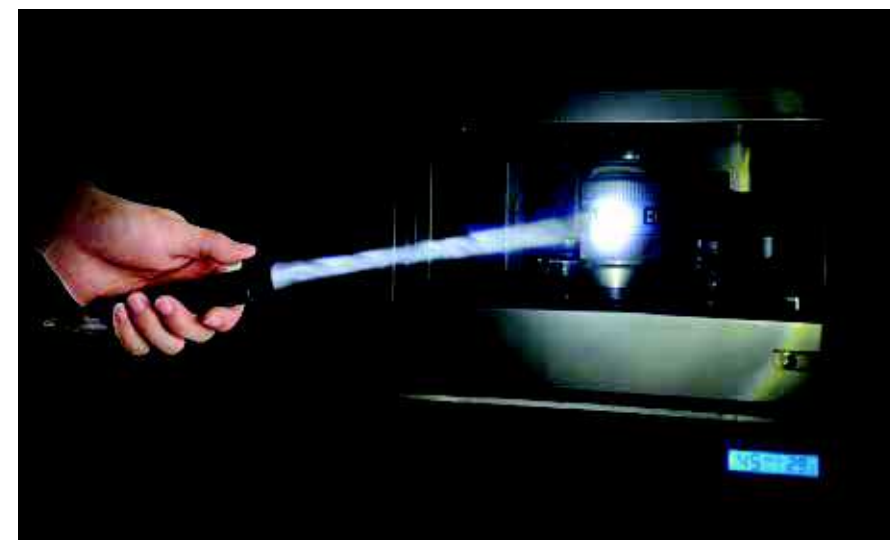

- Features (AC-10<sup>+</sup>)**
- Safe CAT IV-1000V rating and toolbox tough with rubber reinforced case and buttons and low-profile detection tip
  - Vibration and red LED alarms alert users to the presence of voltage in noisy areas
  - Versatile High/Low sensitivity modes detect voltage on industrial equipment and low-voltage installations
  - Powerful LED worklight always ready to illuminate poorly lit locations
  - Inspection light at the probe tip facilitates testing in dark areas
  - IP67 Waterproof